




- Einbaudaten

Maße der TA – EX Reihe:

Modell	Ansaugvolumen m ³ /min	d _a	d _i	d _i	Gewicht	Q	P
	von - bis	mm	Zoll	mm	kg	mm	mm
TA – 20	1,4 – 2,8	133	2"	50,8	0,445	67	86
TA – 25	2,8 – 5,6	165	2,5"	63,5	0,795	86	108
TA – 30	2,8 – 5,6	165	3"	76,2	0,795	86	108
TA – 40	5,6 – 11,3	225	4"	101,6	1,7	121	149
TA – 50	10,0 – 20,0	286	5"	127,0	3	157	190
TA – 60	14,0 – 27,0	324	6"	152,4	3,3	165	197
TA – 70	21,0 – 38,0	375	7"	177,8	4,3	182	216
TA – 80	26,6 – 44,8	375	8"	203,2	4,3	182	216

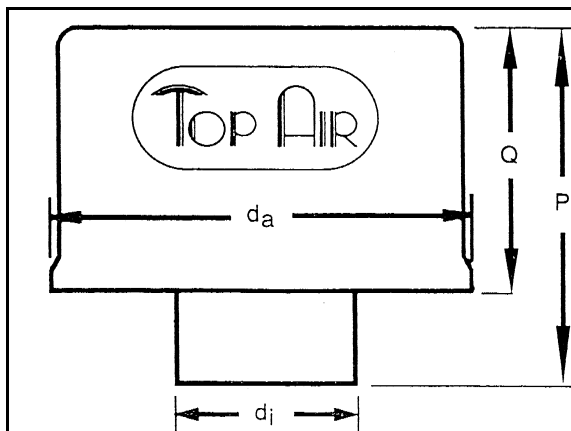

Material der TA – EX Reihe:

Haube: Aluminium
 Korpus mit Anschluß: Edelstahlblech

Material der TA – Reihe:

Haube: Aluminium
 Korpus mit Anschluß: Aluminium-Guss

Maße der TA – Reihe:

Modell	Ansaugvolumen m ³ /min	d _a	d _i	d _i	Gewicht	Q	P
	von - bis	(mm)	(Zoll)	(mm)	(kg)	(mm)	(mm)
TA 150	0,3 - 1,5	80,0	1,5	38,1	0,4	54,0	80,0
TA 200	0,6 - 2,8	133,0	2,0	50,8	0,5	54,0	80,0
TA 255	2,8 - 5,6	165,0	2,5	63,5	1,0	76,0	108,0
TA 330	4,0 - 9,8	225,0	3,0	76,2	1,3	82,5	120,5
TA 440 S	4,0 - 9,8	225,0	4,0	101,6	1,3	82,5	120,5
TA 445	8,5 - 16,8	286,0	4,5	114,3	2,5	139,7	181,0
TA 550	8,5 - 16,8	286,0	5,0	127,0	2,5	139,7	181,0
TA 660 S	8,5 - 16,8	286,0	6,0	152,4	2,5	139,7	181,0
TA 660	11,0 - 23,8	324,0	6,0	152,4	3,5	139,7	181,0
TA 770 L	14,0 - 39,0	376,0	7,0	177,8	4,0	139,7	184,0
TA 880	14,0 - 39,0	376,0	8,0	203,2	4,0	139,7	184,0
TA 990	25,2 - 56,5	435,0	9,0	228,6	5,5	152,4	206,5